

GALVANIZED SHELVES FOR WALK-IN COOLERS

Consolidate your buying process by sourcing your cantilever shelves from the shelf experts! Madix now offers galvanized shelving and uprights for walk-in coolers as standard product.

Galvanized shelving is the go-to option for cooler applications because it provides the following benefits:

- Vastly more economical than stainless steel or aluminum
- Less maintenance required compared to paint or plastic coatings
- Extremely durable – years of use with proper treatment and care
- Lowest long-term cost of any coating type

Madix shelves are available in 18" (457 mm) depth and feature a slatted shelf surface design for improved ventilation, ensuring optimum shelf life for your refrigerated merchandise.

Please refer to cooler manufacturers' documentation/warranty before modifying refrigeration unit.





Galvanized Metal Shelf

- Shelves can be galvanized for packaged products in cooler (not NSF approved)
- Unique, open-vented shelf, not a solid top steel shelf
- Nominal depth of 18" (457 mm) only
- For use with Galvanized Half Upright [(OPT)HU-(NH)]
- **Load capacity is 150 lbs** in all sizes (based on evenly distributed, static load)

GMS-(NW)18

GMS Galvanized Metal Shelf
NW Nominal Width 3' or 4'
(914 mm or 1219 mm)
18 Nominal Depth 18"

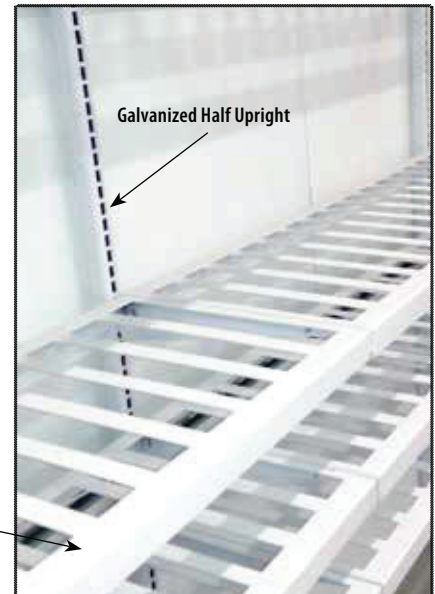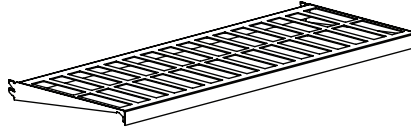

NOTE!

Fixture must be square, plumb, and level.

Galvanized Half Upright

- For use with Galvanized Metal Shelf [GMS-(NW)18] for packaged products in cooler (not NSF approved)
- **Maximum section load capacity is 600 lbs and shelf-load capacity is 150 lbs** in all sizes (based on an evenly distributed, static load)

(OPT)HU-(NH)

OPT G=Galvanized, Blank=Not Galvanized
HU Half Upright
NH Nominal Height 36" to 96" in 6" increments
(914 mm to 2438 mm in 152 mm increments)

NOTE!

Fixture must be square, plumb, and level.
Each anchoring location must provide a minimum of 450 lbs of pull-out resistance.



Galvanized Half Upright Support Bracket

- Used to hold the Galvanized Half Upright [(OPT)HU-(NH)] to the wall of the cooler (not NSF approved)
- Two required for use (at top and bottom of upright)

GHUTSB06

GHUTSB.... Galvanized Half Upright to Support Bracket
06 Nominal Height 6" (152 mm)

