

F Standard Upper Shelf

- 1¼" (32 mm) tag molding integrally formed into front edge of shelf surface
- Load capacity, flat position:
 - 6" (152 mm) to 8" (203 mm) depths = 300 lbs
 - 10" (254 mm) to 24" (610 mm) depths = 500 lbs
 - 26" (660 mm) to 30" (762 mm) depths = 400 lbs
- Load capacities based on evenly distributed static loading

SUS-(NW)(ND)

- SUS Standard Upper Shelf
- NW Nominal Width 2' to 4' in 6" increments (610 mm to 1219 mm in 152 mm increments)
- ND Nominal Depth 8" to 30" in 2" increments (203 mm to 762 mm in 51 mm increments)



G Basic Upright for End Shelf Insert Only

- For use with Round Metal Upper Shelf
- Field assembles to Basic Upright

BUESI(NH)

- BUESI Basic Upright End Shelf Insert Only
- NH Nominal Height 48" to 78" in 6" increments (1219 mm to 1981 mm in 152 mm increments)




H Round Metal Upper Shelf Modified

- Allows continuous display of product at the end of a gondola run
- Does not block view of merchandise
- Load capacity for upper shelf is 200 lbs

RMUSM(NR)

- RMUSM Round Metal Upper Shelf Modified
- NR Nominal Radius 12" to 24" in 2" increments (305 mm to 610 mm in 51 mm increments)

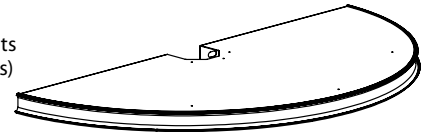


I Round Metal Base Shelf

- Allows continuous display of product at the end of a gondola run
- Does not block view of merchandise
- Load capacity for base shelf is 300 lbs

RMBS(NW)(ND)

- RMBS Round Metal Base Shelf
- NW Nominal Width 24" to 48" in 4" increments (610 mm or 1219 mm in increments of 102 mm)
- ND Nominal Depth 12" to 24" 2" increments (305 mm or 610 mm in increments of 51 mm)

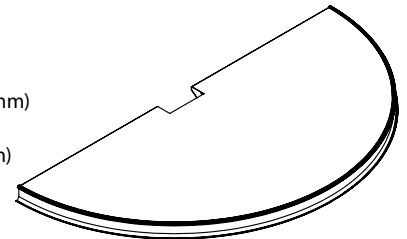

J Round Metal Base Kickplate

- Mounts into gondola Base Shoes
- Required when Base Shelf is ordered
- Standard finishes: Chocolate or Black

RMBKP(NW)(ND)

- RMB Round Metal Base
- KP Kickplate
- NW Nominal Width 24" to 48" in 4" increments (610 mm or 1219 mm in increments of 102 mm)
- ND Nominal Depth 12" to 24" 2" increments (305 mm or 610 mm in increments of 51 mm)

