


## Round Feature Aisle Display

- Efficiently display merchandise in main aisles or high traffic areas of stores
- Perfect for both small and large sales floors
- Lifts sales by displaying merchandise on completely around the fixture
- Utilize the shelves alone, or combine with pegboard for displaying pegged merchandise
- Load capacity 800 lbs in all sizes, based on evenly distributed static loading and 500 rolling (DO NOT move fully loaded)

### Round Unit Parts List

Part Number	Part Number	Quantity	Notes
A	B(TYPE)-(NW)(NH) Back Panel	2	12" x 54"
B	BU-(AH) Basic Upright	2	54" (36" to 96" in 6" increments)
C	BSSIL-(ND) Base Shoe, Straight-In Locking	4	16"
D	SBS-(NW)(ND) Standard Base Shelf	2	12" x 16"
E	KP-(NL) Kickplate	2	12"
F	SUS-(NW)(ND) Standard Base Shelf	8	12" x 16"
G	BUESI(NH) Basic Upright for End Shelf	2	54", Insert Only
H	RMUSM(NR) Rounded Metal Upper Shelf Modified	8	16"
I	RMBS(NW)(ND) Rounded Metal Base Shelf Assembly	2	32" x 16"
J	RMBKP(NW)(ND) Rounded Metal Base Kick Plate	2	32" x 16"

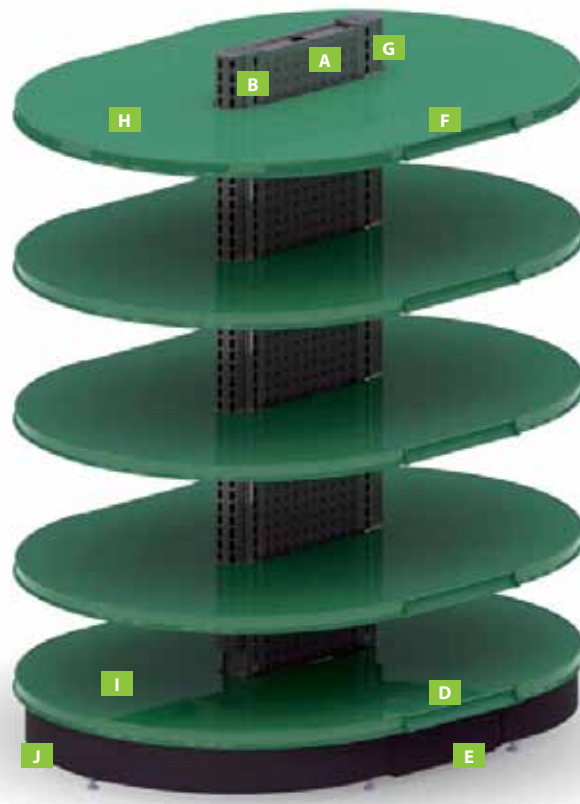

Hidden Parts

**A Back Panel**

- Choose either Pegboard or Hardboard
- Nominal Height minimum of 60" to 72" in 6" increments (1524 mm to 1829 mm in 152 mm increments)

**B(TYPE)-(NW)(NH)**

B .... Back  
 TYPE .... P=Pegboard, H=Hardboard  
 NW .... Nominal Width 3' or 4'  
 (914 mm or 1219 mm)  
 NH .... Nominal Height  
 36" to 72" in 6" increments  
 (914 mm to 1829 mm  
 in 152 mm increments)




**B Basic Upright**

- Slotted 1" (25 mm) OC for flexibility plus maximum space
- Engineered of heavy gauge, high tensile steel components welded into a single unit with a 15,000 inch-pound rating
- All Basic Uprights have integral leveler

**BU-(AH)**

BU .... Basic Upright  
 AH .... Actual Height 36" to 96" in 6" increments  
 (914 mm to 2438 mm in 152 mm increments)




**C Base Shoe, Straight In Locking**

- Projection welded high tensile steel gives maximum load capacity
- Exclusive "I" beam design is 5" (127 mm) low
- Screwdriver leveling and electrical access
- Straight in insertion does not require tipping of the Basic Upright for installation
- Finishes are random unless Chocolate specified

**BSSIL-(ND)**

BSSIL .... Straight In Locking Base Shoe  
 ND .... Nominal Depth 12" to 30" in 2" increments  
 (304 mm to 762 mm in 50 mm increments)

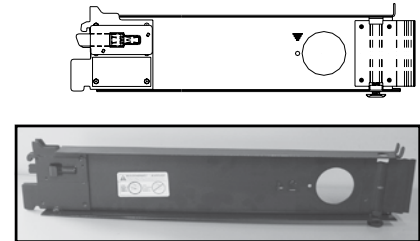


**D Standard Base Shelf**

- Formed price tag molding matches molding on upper shelves
- Heavy-gauge shelf bracket features lock tab to ensure quick installation and precision alignment
- Load capacity 600 lbs in all sizes, based on evenly distributed static loading
- Flush Front option available

**SBS-(NW)(ND)**

SBS .... Standard Base Shelf  
 NW .... Nominal Width 2' to 4" in 6" increments  
 (610 mm to 1219 mm in 152 mm increments)  
 ND .... Nominal Depth 12" to 30" in 2" increments  
 (305 mm to 762 mm in 51 mm increments)

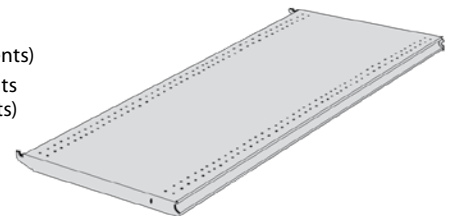

**Configurable Options**

**TYPE-OPT**

TYPE .... Blank=Perforated  
 NP=Non-Perforated  
 OPT .... Optional Covering:  
 L=Laminate, C=Carpet, F=Fabric


**Finish Code**

FIN1 .... Shelf Color  
 FIN2 .... Tag Mold Option:  
 Blank=Painted Color of Shelf  
 DGA2G=Gold Finish  
 DGA2P=Powder Coat Finish-Different from Shelf  
 DGA2A=Silver Finish

**E Kickplate**

**KP-(NL)**

KP .... Kickplate  
 NL .... Nominal Length 12"  
 (305 mm)



### F Standard Upper Shelf

- 1¼" (32 mm) tag molding integrally formed into front edge of shelf surface
- Load capacity, flat position:
  - 6" (152 mm) to 8" (203 mm) depths = 300 lbs
  - 10" (254 mm) to 24" (610 mm) depths = 500 lbs
  - 26" (660 mm) to 30" (762 mm) depths = 400 lbs
- Load capacities based on evenly distributed static loading

### SUS-(NW)(ND)

- SUS .... Standard Upper Shelf
- NW .... Nominal Width 2' to 4' in 6" increments (610 mm to 1219 mm in 152 mm increments)
- ND .... Nominal Depth 8" to 30" in 2" increments (203 mm to 762 mm in 51 mm increments)



### G Basic Upright for End Shelf Insert Only

- For use with Round Metal Upper Shelf
- Field assembles to Basic Upright

### BUESI(NH)

- BUESI .... Basic Upright End Shelf Insert Only
- NH .... Nominal Height 48" to 78" in 6" increments (1219 mm to 1981 mm in 152 mm increments)




### H Round Metal Upper Shelf Modified

- Allows continuous display of product at the end of a gondola run
- Does not block view of merchandise
- Load capacity for upper shelf is 200 lbs

### RMUSM(NR)

- RMUSM .... Round Metal Upper Shelf Modified
- NR .... Nominal Radius 12" to 24" in 2" increments (305 mm to 610 mm in 51 mm increments)

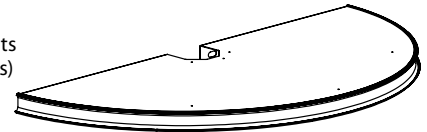


### I Round Metal Base Shelf

- Allows continuous display of product at the end of a gondola run
- Does not block view of merchandise
- Load capacity for base shelf is 300 lbs

### RMBS(NW)(ND)

- RMBS .... Round Metal Base Shelf
- NW .... Nominal Width 24" to 48" in 4" increments (610 mm or 1219 mm in increments of 102 mm)
- ND .... Nominal Depth 12" to 24" 2" increments (305 mm or 610 mm in increments of 51 mm)

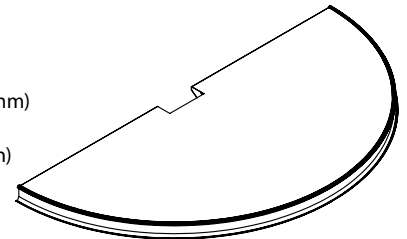

### J Round Metal Base Kickplate

- Mounts into gondola Base Shoes
- Required when Base Shelf is ordered
- Standard finishes: Chocolate or Black

### RMBKP(NW)(ND)

- RMB .... Round Metal Base
- KP .... Kickplate
- NW .... Nominal Width 24" to 48" in 4" increments (610 mm or 1219 mm in increments of 102 mm)
- ND .... Nominal Depth 12" to 24" 2" increments (305 mm or 610 mm in increments of 51 mm)

